




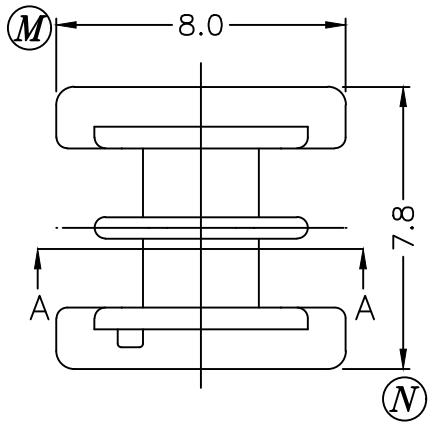


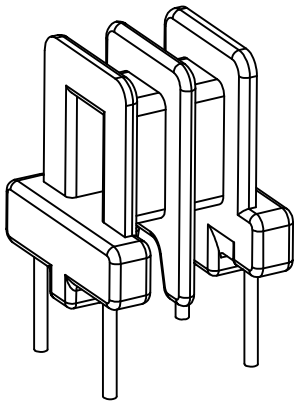

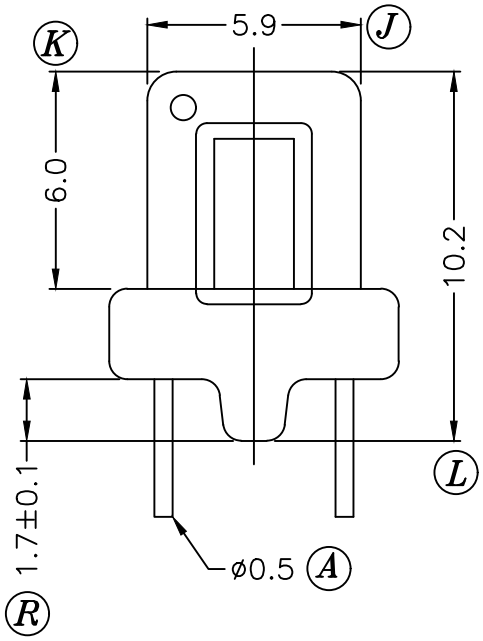

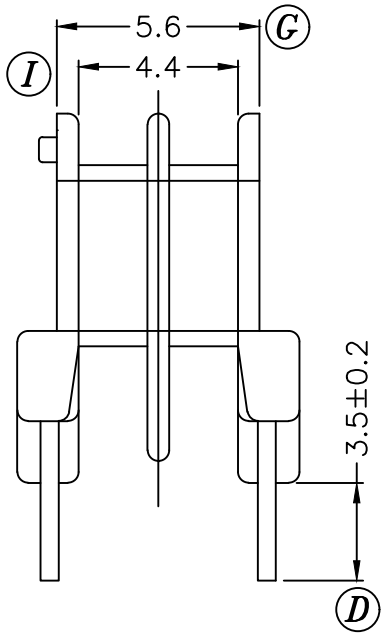

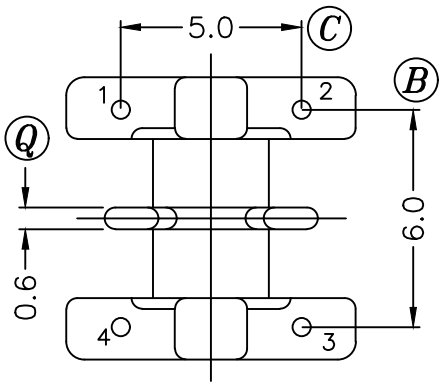

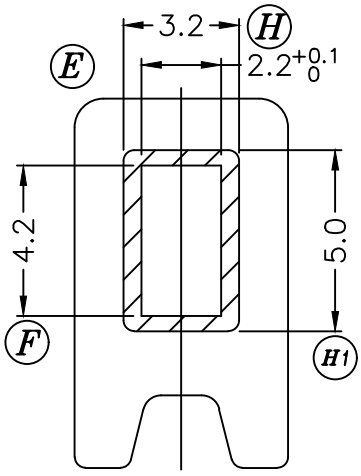

SEC.A–A

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(O):1.1 CHENGE TO 1.7 ,(L):9.6 CHENGE TO 10.2		4	UPDATE DRAWING	'07.11.04
2	CANCEL (P),(O),(R); PIN TENSION LOAD 1.0 -->0.7;	'03.03.27	5	ADD TO STANDOFF	'07.12.30
3	CANCEL THE Ⓔ TOLERANCE AND THE DIMENSION Ⓓ	'04.03.30	6	ADD DIMENSION Ⓡ .	'20.08.17

DRAWN & DRAFTED BY	HUANG JIN YU	TOLERANCES: 0<L≦4 ±0.1; 4<L≦16 ±0.2; 16<L≦63 ±0.3; pin pitch ±0.2	ANGLE: ±1°	TITLE: T-H BOBBIN EE-8.3(2 SEC)	
CHECKED & APPROVED BY			UNIT: MM	BOBBIN MATERIAL: PHENOLIC PM-9820	UL REC. UL 94V-0
PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546			ORIGIN: DG SZ	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 0.7KG MIN
				DATE: MAR.30. '2004	DRAWING NO. P-813 / REV. 6