




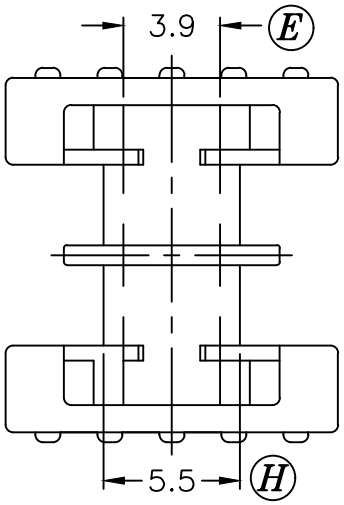


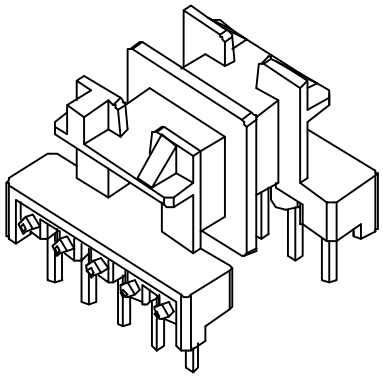

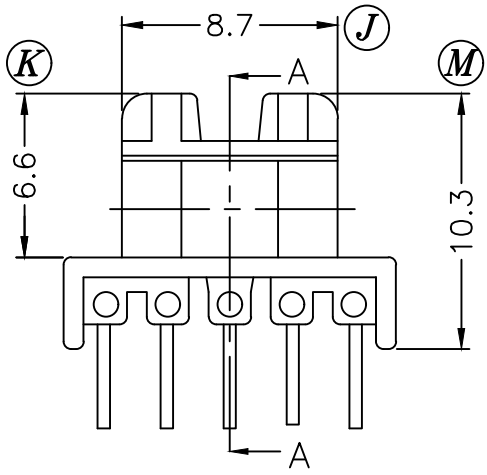

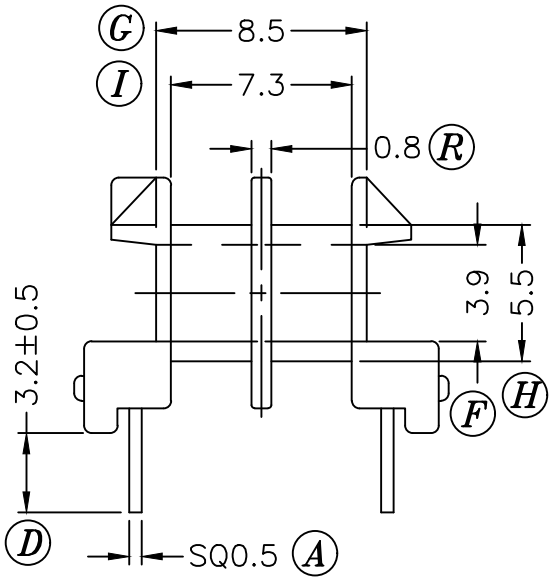

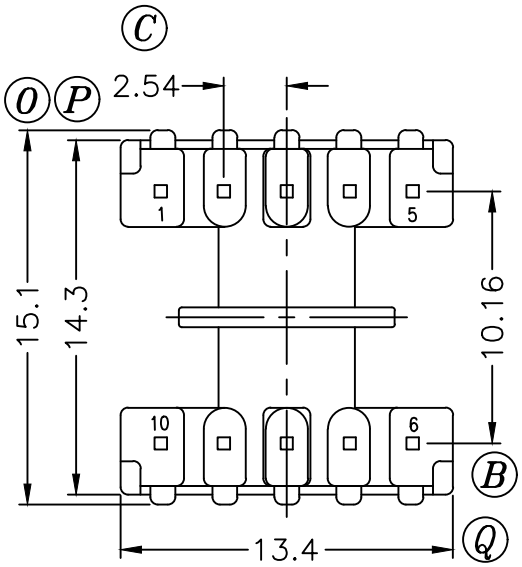

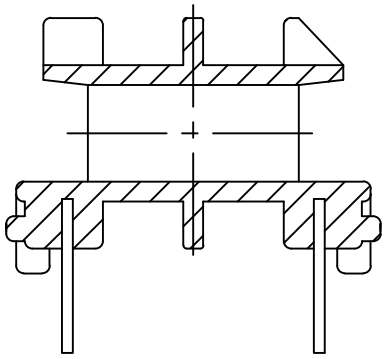

SEC. A–A

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE

DRAWN & DRAFTED BY	HUANG JIN YU	TOLERANCES: 0<L≦4 ±0.1; 4<L≦16 ±0.2; 16<L≦63 ±0.3; pin pitch ±0.2	ANGLE: ±1°	TITLE: T–H BOBBIN EF–12.6 (2 SEC)	
CHECKED & APPROVED BY			UNIT: MM	BOBBIN MATERIAL: PM 9820JR(BK)	UL REC. UL 94V–0
PIN SHINE INDUSTRIAL CO.,LTD. TEL:886–2–22990545 FAX:886–2–22990546			ORIGIN: DG	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.5KG MIN
				DATE: ARP.08 '2021	DRAWING NO. P–1205–1 / REV. 0