




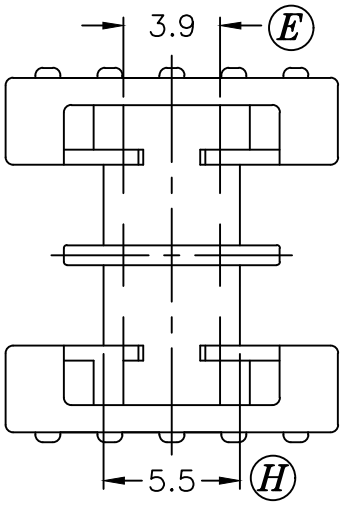


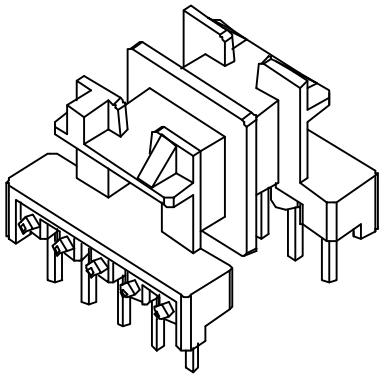

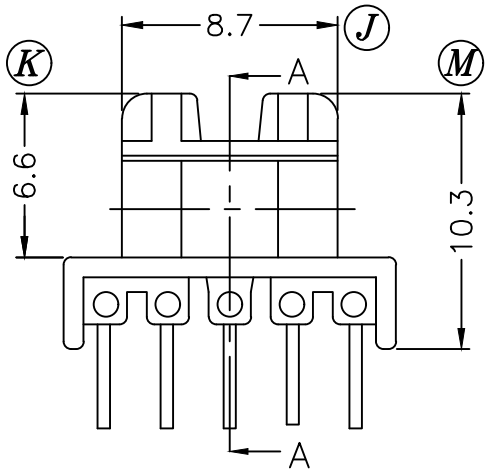

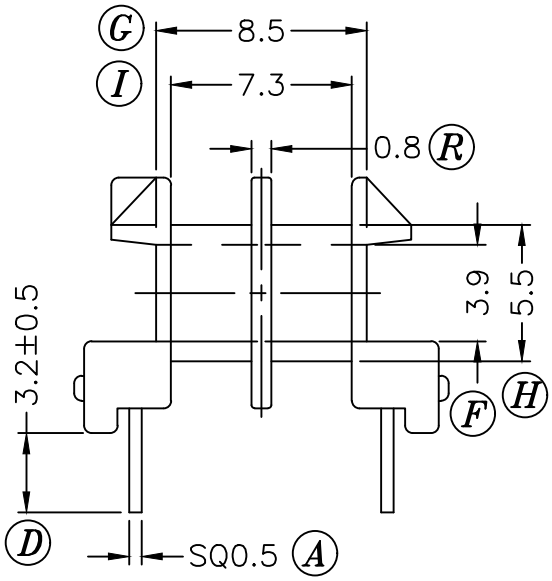

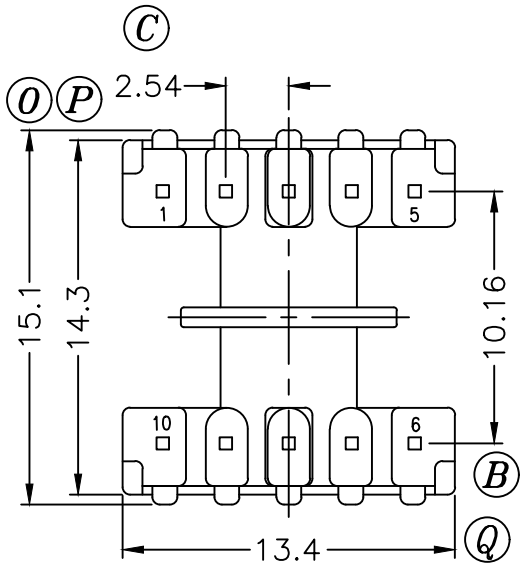

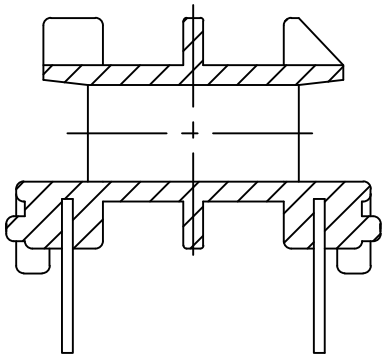

SEC. A–A

此機種是在P-1205的基礎上新增PM 9630JT(BK)材質生產.

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE

DRAWN & DRAFTED BY	GUAN XIN HAI	TOLERANCES: 0<L≦4 ±0.1; 4<L≦16 ±0.2; 16<L≦63 ±0.3; pin pitch ±0.2	ANGLE: ±1°	TITLE: T–H BOBBIN EF–12.6 (2 SEC)	
CHECKED & APPROVED BY			UNIT: MM	BOBBIN MATERIAL: PM 9630JT(BK)	UL REC. UL 94V–0
PIN SHINE INDUSTRIAL CO.,LTD. TEL:886–2–22990545 FAX:886–2–22990546			ORIGIN: DG	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.5KG MIN
				DATE: 2023.12.18 / DRAWING NO. P–1205–2	REV. 0