



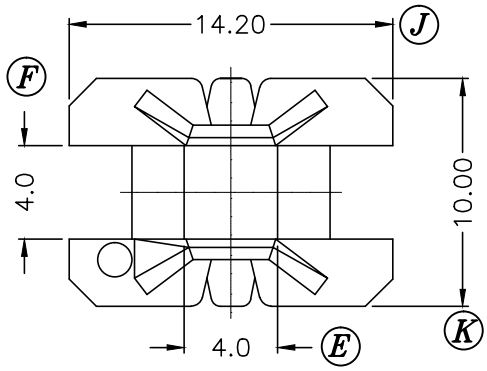


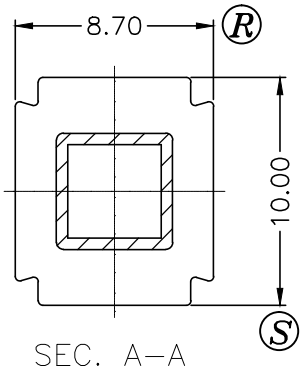


SEC. A–A

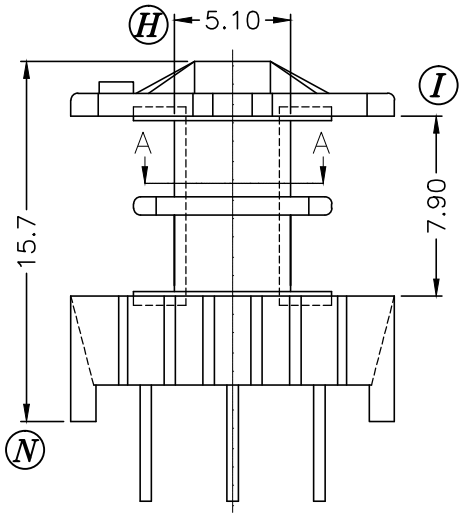

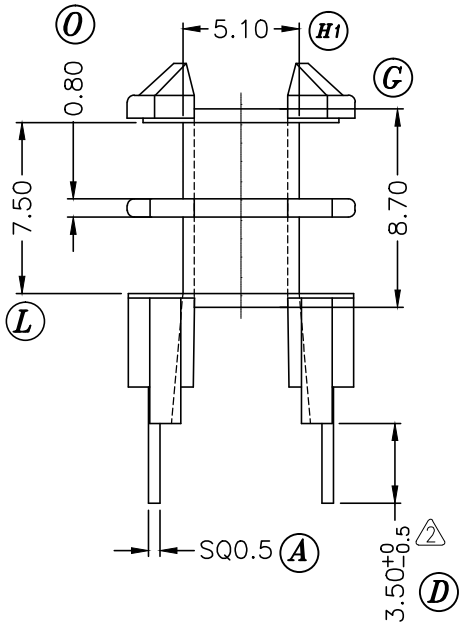

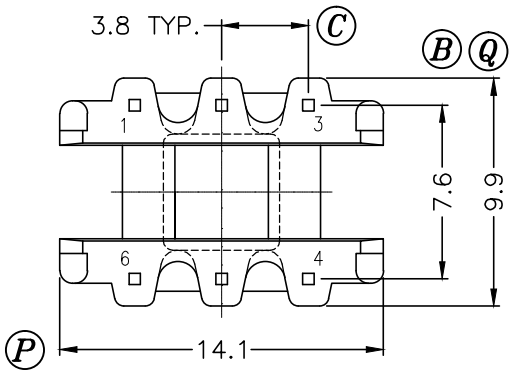



REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	CANCEL (M); UPDATE DRAWING				
2	變更腳長 2	10.06.17			

DRAWN & DRAFTED BY	計 輝	TOLERANCES: 0<L≦4 ±0.1; 4<L≦16 ±0.2; 16<L≦63 ±0.3; pin pitch ±0.2	ANGLE: ±1°	TITLE: T–H BOBBIN EF–12.6 (2 SEC)	
CHECKED & APPROVED BY			UNIT: MM	BOBBIN MATERIAL: PET FR530	UL REC. UL 94V–0
PIN SHINE INDUSTRIAL CO.,LTD. TEL:886–2–22990545 FAX:886–2–22990546			ORIGIN: ZZ	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.5KG MIN.
				DATE: MAR.31 '2003	DRAWING NO. P–1208 / REV. 2