
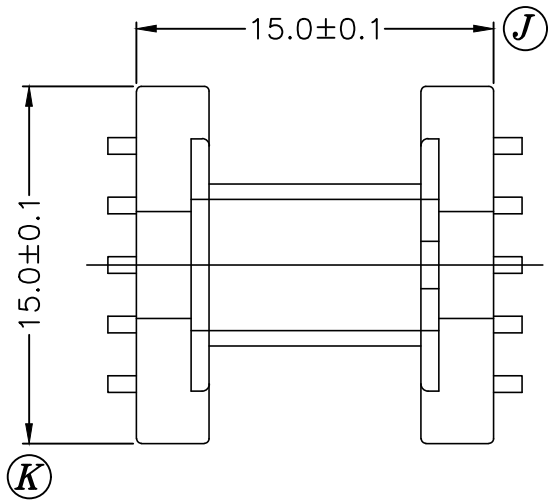
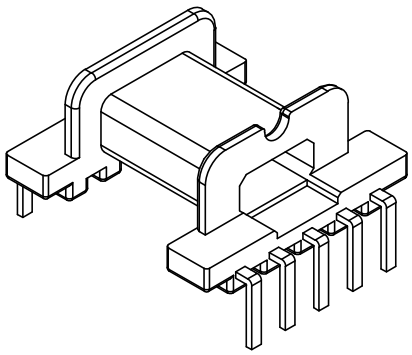
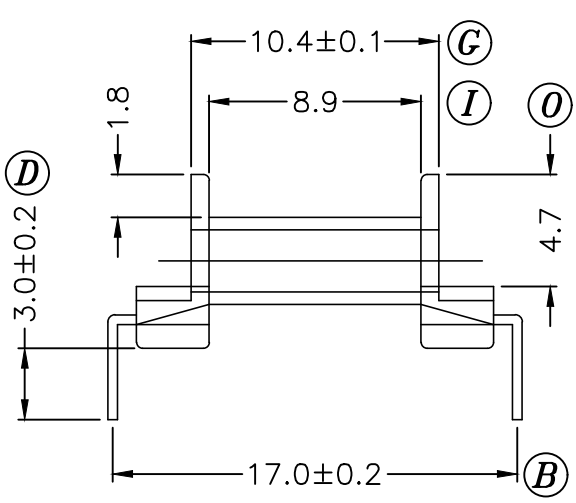
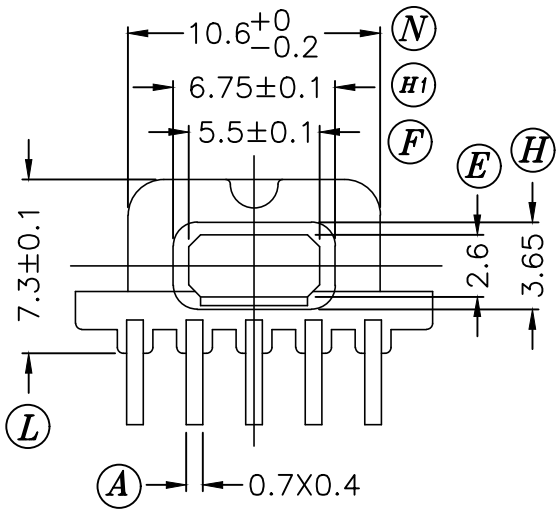
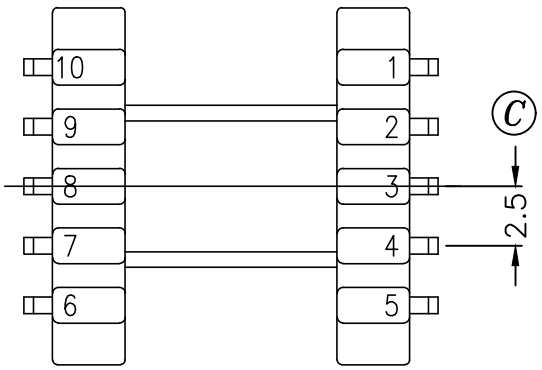


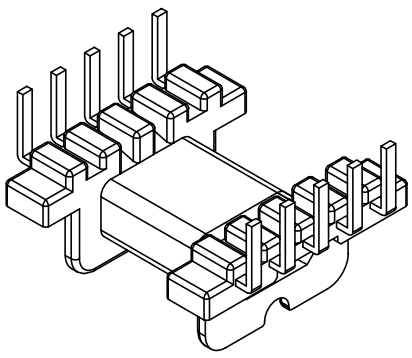

B−111.101L(B−026−2)

| REV. | REVISIONS REC. | DATE | REV. | REVISIONS REC. | DATE |
|---|---|---|---|---|---|
| 1 | CANCEL (P); PIN TENSION LOAD 0.9KG −>1.5KG. | | | | |
| 2 | UPDATE DRAWING | '04.12.13 | | | |
| | | | | | |

| | | | | | | |
|---|---|---|---|---|---|---|
| DRAWN & DRAFTED BY | DONG CF | TOLERANCES | | ANGLE: ±1° | TITLE: L TYPE BOBBIN EFD−15 | |
| CHECKED & APPROVED BY | | 0<L≦4 ±0.1<br>4<L≦16 ±0.2<br>16<L≦63 ±0.3 | pin pitch ±0.2 | UNIT: MM | BOBBIN MATERIAL: LCP E4008 | UL REC. UL 94V−0 |
| PIN SHINE INDUSTRIAL CO.,LTD.<br>TEL:886−2−22990545 FAX:886−2−22990546 | | | | ORIGIN: DG | PIN MATERIAL: PHOSPHOR BRONZE | PIN TENSION LOAD: 1.5KG MIN |
| | | | | | DATE: APR.01 '2003 | DRAWING NO. P−1506 / REV. 2 |