










SEC.B–B



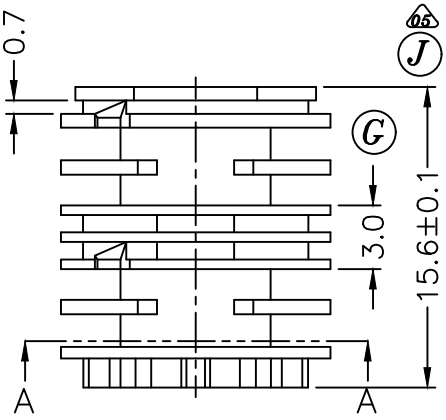

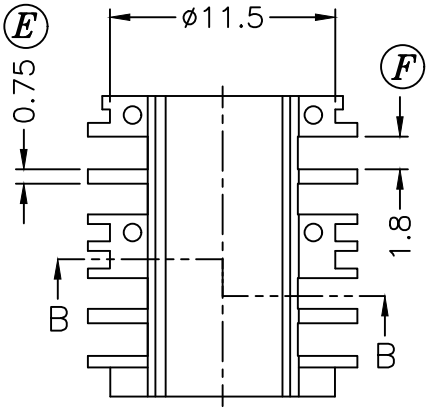

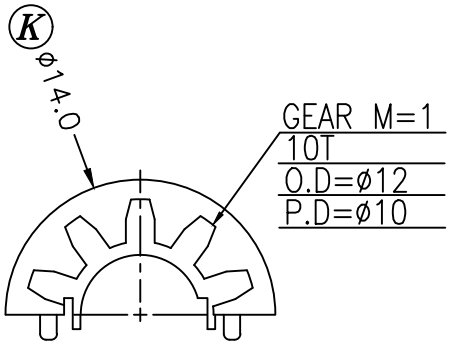

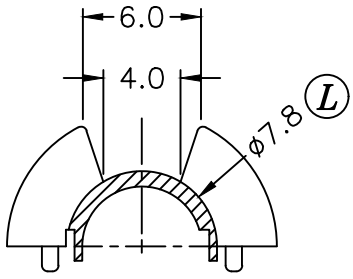

SEC.A–A

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
2	(L):ADD A DEMENSION		5	DIM.(J) 15.6±0.2 CHANGE TO 15.6±0.1 (05)	2021.07.05
3	CANCEL (N),(B),(H),(D),(M); UPDATE DRAWING.				
4	DIM.(A) ø6.0 CHANGE TO ø5.8				

DRAWN & DRAFTED BY	HUANG JIN YU	TOLERANCES: 0<L≦4 ±0.1; 4<L≦16 ±0.2; 16<L≦63 ±0.3; pin pitch ±0.2	ANGLE: ±1°	TITLE: BOBBIN ET-20 (4 SEC)	
CHECKED & APPROVED BY			UNIT: MM	BOBBIN MATERIAL: PBT 4115	UL REC. UL 94V-0
PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546			ORIGIN: DG SZ	PIN MATERIAL:	PIN TENSION LOAD:
				DATE: JUL.05 '2004	DRAWING NO. P-2003 / REV. 5